

09

LED Strips & Profiles

Pages 225-266

SMD LED | LED
12V DC | 24V DC

   IP20 IP54 IP65 IP67 IP68

   75 CRI 80 CRI 85 CRI 95 CRI   






The Indoor Range 12V



7821 | 4,8W/m | SMD 3528 | 60LEDs/m

3M Double face adhesive.



Supplied in 5m roll.




Dimming remote control.
Order code 20030.



7831 | 14,4W/m | SMD 5050 | 60LEDs/m


3M Double face adhesive.



Supplied in 5m roll.



Dimming remote control.
Order code 20030.

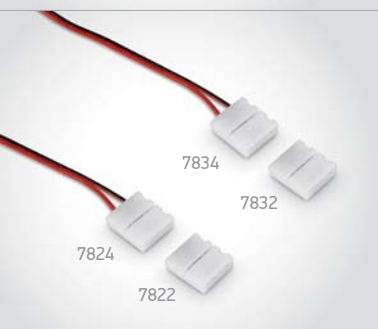

Accessories for 7821 & 7831



7821

7824 Power supply cable
7822 Connector

7831

7834 Power supply cable
7832 Connector

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7821/D	Daylight	6000K	4,8W/m	360lm/m	12V DC		40	Requires 12V DC driver
7831/C	Cool white	4000K	14,4W/m	1050lm/m	12V DC		40	Requires 12V DC driver



7833/W

The Ultra Slim Range 24V




A-A+ Ultra slim

IP20

7823 | 9,6W/m | SMD 2216 | 140LEDs/m | Ultra slim

3M Double face adhesive.



Supplied in 5m roll.



Dimming remote control.
Order code 20030.




A-A+ Ultra slim

IP20

7833 | 14,4W/m | SMD 2110 | 196LEDs/m


3M Double face adhesive.



Supplied in 5m roll.



Dimming remote control.
Order code 20030.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7823/C	Cool white	4000K	9,6W/m	960lm/m	24V DC	III	40	Requires 24V DC driver
7823/W	Warm white	3000K	9,6W/m	864lm/m	24V DC	III	40	Requires 24V DC driver
7823/EW	Extra warm white	2700K	9,6W/m	768lm/m	24V DC	III	40	Requires 24V DC driver
7833/C	Cool white	4000K	14,4W/m	1300lm/m	24V DC	III	40	Requires 24V DC driver
7833/W	Warm white	3000K	14,4W/m	1200lm/m	24V DC	III	40	Requires 24V DC driver
7833/EW	Extra warm white	2700K	14,4W/m	1160lm/m	24V DC	III	40	Requires 24V DC driver

one




The 4,8W/m Indoor 24V



7820 | 4,8W/m | SMD 2216 | 70LEDs/m

3M Double face adhesive.



Supplied in 5m roll.




Dimming remote control.
Order code 20030.



A-A+

IP20

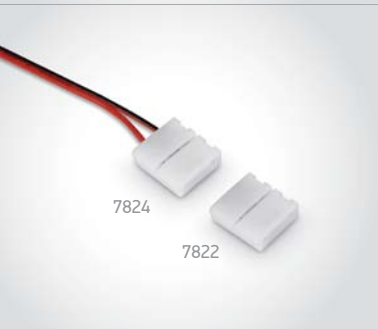

7824

7822

Accessories for 7820



7824 Power supply cable
7822 Connector

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7820/D	Daylight	6000K	4,8W/m	480lm/m	24V DC		40	Requires 24V DC driver
7820/C	Cool white	4000K	4,8W/m	480lm/m	24V DC		40	Requires 24V DC driver
7820/W	Warm white	3000K	4,8W/m	432lm/m	24V DC		40	Requires 24V DC driver
7820/EW	Extra warm white	2700K	4,8W/m	384lm/m	24V DC		40	Requires 24V DC driver
7820/UW	Ultra warm white	2200K	4,8W/m	384lm/m	24V DC		40	Requires 24V DC driver

The 4,8W/m Outdoor 24V




A-A++

IP68

7820W | 4,8W/m | SMD 2216 | 70LEDs/m | Silicone

3M Double face adhesive.



Supplied in 5m roll.



Dimming remote control.
Order code 20030.




A-A++

IP68

offer

7820AW | 4,8W/m | SMD 3528 | 60LEDs/m | Silicone

NO adhesive.



Supplied in 5m roll.



Dimming remote control.
Order code 20030.



7826

7828

Accessories for 7820W & 7820AW



7826 Mounting clip
7828 End cup


Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7820W/D	Daylight	6000K	4,8W/m	432lm/m	24V DC		40	Requires 24V DC driver / Avoid direct sunlight
7820W/C	Cool white	4000K	4,8W/m	432lm/m	24V DC		40	Requires 24V DC driver / Avoid direct sunlight
7820W/W	Warm white	3000K	4,8W/m	390lm/m	24V DC		40	Requires 24V DC driver / Avoid direct sunlight
7820W/EW	Extra warm white	2700K	4,8W/m	346lm/m	24V DC		40	Requires 24V DC driver / Avoid direct sunlight
7820AW/W	Warm white	3000K	4,8W/m	280lm/m	24V DC		40	Requires 24V DC driver / Avoid direct sunlight

The 9,6W/m 24V SMD 2216 140LEDs/m



7829 | 9,6W/m | SMD 2216 | 140LEDs/m

3M Double face adhesive.



Supplied in 5m roll.



Dimming remote control.
Order code 20030.



A-A+

IP20

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Box	Notes
7829/C	Cool white	4000K	9,6W/m	960lm/m	24V DC	III	40	Requires 24V DC driver
7829/W	Warm white	3000K	9,6W/m	864lm/m	24V DC	III	40	Requires 24V DC driver
7829/EW	Extra warm white	2700K	9,6W/m	768lm/m	24V DC	III	40	Requires 24V DC driver




The 14,4W/m CRI97 Indoor 24V Full spectrum



7835C | 14,4W/m | SMD 2835 | 70LEDs/m


3M Double face adhesive.



Supplied in 5m roll.



Dimming remote control.
Order code 20030.

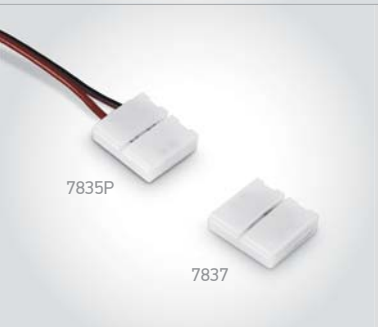

Accessories for 7835C



7835P Power supply cable
7837 Connector

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7835C/C	Cool white	4000K	14,4W/m	1008lm/m	24V DC		40	Requires 24V DC driver
7835C/W	Warm white	3000K	14,4W/m	864m/m	24V DC		40	Requires 24V DC driver




The 14,4W/m Indoor 24V



7830 | 14,4W/m | SMD 5050 | 60LEDs/m

3M Double face adhesive.



Supplied in 5m roll.



Dimming remote control.
Order code 20030.




Cut every 10cm
(6-LED segment)



7835 | 14,4W/m | SMD 2835 | 70LEDs/m

3M Double face adhesive.



Supplied in 5m roll.



Dimming remote control.
Order code 20030.



Cut every 10cm
(7-LED segment)



7834/7835P

7832/7837

Accessories for 7830 & 7835



7830

7835

7834 Power supply cable
7832 Connector

7835P Power supply cable
7837 Connector


Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7830/EW	Extra warm white	2700K	14,4W/m	980lm/m	24V DC		40	Requires 24V DC driver
7835/D	Daylight	6000K	14,4W/m	1300lm/m	24V DC		40	Requires 24V DC driver
7835/C	Cool white	4000K	14,4W/m	1300lm/m	24V DC		40	Requires 24V DC driver
7835/W	Warm white	3000K	14,4W/m	1152lm/m	24V DC		40	Requires 24V DC driver
7835/EW	Extra warm white	2700K	14,4W/m	1008lm/m	24V DC		40	Requires 24V DC driver

The 14,4W/m Outdoor 24V



7835W | 14,4W/m | SMD 2835 | 70LEDs/m | Silicone

3M Double face adhesive.



Supplied in 5m roll.



Dimming remote control.
Order code 20030.

Cut every 10cm
(7-LED segment)



7827 | Mounting clip for 7835W




Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Box	Notes
7835W/D	Daylight	6000K	14,4W/m	1170lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7835W/C	Cool white	4000K	14,4W/m	1170lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7835W/W	Warm white	3000K	14,4W/m	1040lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7835W/EW	Extra warm white	2700K	14,4W/m	910lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight

Connect In One Length Range 24V



7813L | 3W/m | SMD 2835 | 60LEDs/m

Can be connected in 30m full length / 3M Double face adhesive.



Supplied in 30m roll.




A-A++

IP20



7820L | 4,8W/m | SMD 2216 | 60LEDs/m

Can be connected in 15m full length / 3M Double face adhesive.



Supplied in 15m roll.



Dimming remote control. Order code 20030.



A-A++

IP20



7820WL | 4,8W/m | SMD 2216 | 60LEDs/m | Silicone

Can be connected in 15m full length / 3M Double face adhesive.



Supplied in 15m roll.



Dimming remote control. Order code 20030.



A-A++

IP68

Accessories for 7820WL



7826 Mounting clip

7828 End cup

7826

7828

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7813L/W	Warm white	3000K	3W/m	240lm/m	24V DC		20	Requires 24V DC driver
7820L/C	Cool white	4000K	4,8W/m	384lm/m	24V DC		40	Requires 24V DC driver
7820L/W	Warm white	3000K	4,8W/m	336lm/m	24V DC		40	Requires 24V DC driver
7820L/EW	Extra warm white	2700K	4,8W/m	312lm/m	24V DC		40	Requires 24V DC driver
7820WL/W	Warm white	3000K	4,8W/m	302lm/m	24V DC		20	Requires 24V DC driver / Avoid direct sunlight




The Vertical Light Range 24V



7820V | 4,8W/m | SMD 3014 | 60LEDs/m | Vertical light

3M Double face adhesive.



Supplied in 5m roll.



Dimming remote control.
Order code 20030.




A-A++

IP20



7835V | 14,4W/m | SMD 3014 | 120LEDs/m | Vertical light

3M Double face adhesive.



Supplied in 5m roll.




Dimming remote control.
Order code 20030.



A-A++

IP20

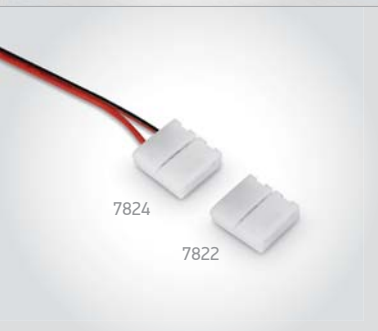

7824

7822

Accessories for 7820V & 7835V



7824 Power supply cable
7822 Connector

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7820V/C	Cool white	4000K	4,8W/m	500lm/m	24V DC		40	Requires 24V DC driver
7820V/W	Warm white	3000K	4,8W/m	450lm/m	24V DC		40	Requires 24V DC driver
7835V/C	Cool white	4000K	14,4W/m	1300lm/m	24V DC		40	Requires 24V DC driver
7835V/W	Warm white	3000K	14,4W/m	1152lm/m	24V DC		40	Requires 24V DC driver




A-A++


IP20

7825 | 19,2W/m | SMD 2835 | 140LEDs/m

3M Double face adhesive.



Supplied in 5m roll.




A-A++


IP20

7870/C | 19,2W/m | SMD 3528 | 240LEDs/m

No shadow / 3M Double face adhesive.



Supplied in 5m roll.




A-A++


IP20

7870 | 19,2W/m | SMD 2216 | 238LEDs/m

No shadow / 3M Double face adhesive.



Supplied in 5m roll.




A-A++

IP20

7875/D | 19,2W/m | SMD 3528 | 240LEDs/m

3M Double face adhesive.



Supplied in 5m roll.




A-A++

IP20

7875 | 19,2W/m | SMD 2216 | 240LEDs/m

3M Double face adhesive.



Supplied in 5m roll.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7825/C	Cool white	4000K	19,2W/m	1728lm/m	24V DC		40	Requires 24V DC driver
7825/W	Warm white	3000K	19,2W/m	1536lm/m	24V DC		40	Requires 24V DC driver
7825/EW	Extra warm white	2700K	19,2W/m	1344lm/m	24V DC		40	Requires 24V DC driver
7870/C	Cool white	4000K	19,2lm/m	1300lm/m	24V DC		40	Requires 24V DC driver
7870/D	Daylight	6000K	19,2lm/m	1920lm/m	24V DC		40	Requires 24V DC driver
7870/W	Warm white	3000K	19,2lm/m	1728lm/m	24V DC		40	Requires 24V DC driver
7875/D	Daylight	6000K	19,2lm/m	1400lm/m	24V DC		40	Requires 24V DC driver
7875/C	Cool white	4000K	19,2lm/m	1536lm/m	24V DC		40	Requires 24V DC driver
7875/W	Warm white	3000K	19,2lm/m	1344lm/m	24V DC		40	Requires 24V DC driver

The 24W/m Indoor 24V



7845 | 24W/m | SMD 2216 | 300LEDs/m


No shadow / 3M Double face adhesive.



LED BUILT IN 90 CRI DIMMABLE+
CE 5 YEAR




Supplied in 5m roll.

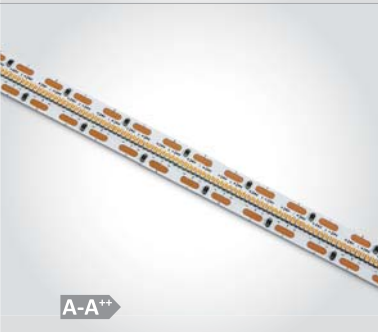

7887 | 24W/m | SMD 2110 | 700LEDs/m


3M Double face adhesive.



LED BUILT IN 90 CRI DIMMABLE+
CE 5 YEAR



Supplied in 5m roll.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Box	Notes
7845/C	Cool white	4000K	24W/m	1900lm/m	24V DC	III	40	Requires 24V DC driver
7845/W	Warm white	3000K	24W/m	1800lm/m	24V DC	III	40	Requires 24V DC driver
7845/EW	Extra warm white	2700K	24W/m	1750lm/m	24V DC	III	40	Requires 24V DC driver
7887/W	Warm white	3000K	24W/m	2050lm/m	24V DC	III	40	Requires 24V DC driver



7885/C

The High Power Strips 24V




A-A++

IP20

7880 | 28,8W/m | SMD 2835 | 120LEDs/m

3M Double face adhesive.



Supplied in 5m roll.




A-A++

IP20

7882 | 42W/m | SMD 2835 | 240LEDs/m

3M Double face adhesive.



Supplied in 2m roll.




A-A++


IP20

7885 | 48W/m | SMD 2835 | 294LEDs/m

3M Double face adhesive.



Supplied in 2m roll.

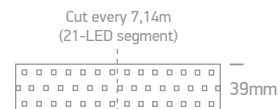

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7880/D	Daylight	6000K	28,8W/m	2304lm/m	24V DC		40	Requires 24V DC driver
7880/C	Cool white	4000K	28,8W/m	2304lm/m	24V DC		40	Requires 24V DC driver
7880/W	Warm white	3000K	28,8W/m	2016lm/m	24V DC		40	Requires 24V DC driver
7882/W	Warm white	3000K	42W/m	6100lm/m	24V DC		40	Requires 24V DC driver
7885/C	Cool white	4000K	48W/m	4800lm/m	24V DC		20	Requires 24V DC driver
7885/W	Warm white	3000K	48W/m	4320lm/m	24V DC		20	Requires 24V DC driver

one




2700K



6500K

The 20W/m Variable Colour Temperature

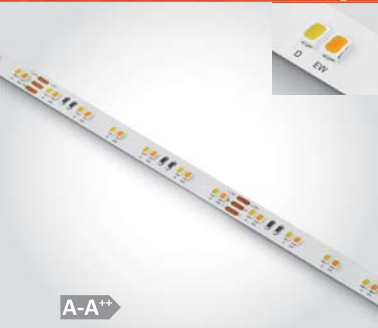

A-A

IP20

7835/DEW | 20W/m | SMD 2835 | 120LEDs/m

3M Double face adhesive.



Supplied in 5m roll.



Variable colour temperature.




IP20

20032 | 12-24V DC | Variable colour temperature controller & dimmer | 2 channels x 3A



Remote controller for changing colour temperature from extra warm white to daylight. Suitable for use with LED strips 7835/DEW. 50 meters range, includes dimmer control and programme mode.

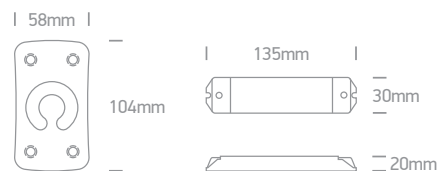

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Class	Notes
7835/DEW	Extra warm white - Daylight	2700K - 6500K	20W/m	600lm/m (EW) + 800lm/m (D)	24V DC	◆	40	Requires 12-24V DC driver




The Blue LED Strips 24V



7820/BL | 4,8W/m | SMD 3528 | 60LEDs/m

3M Double face adhesive.



Supplied in 5m roll.




Dimming remote control.
Order code 20030.



7820W/BL | 4,8W/m | SMD 3528 | 60LEDs/m | Silicone

3M Double face adhesive.



Supplied in 5m roll.



Dimming remote control.
Order code 20030.



Order Code	Light Colour	Input	Input	Class		Notes
7820/BL	Blue	4,8W/m	24V DC		40	Requires 24V DC driver
7820W/BL	Blue	4,8W/m	24V DC		40	Requires 24V DC driver / Avoid direct sunlight




LED Strips Complete Sets



A-A++ RGB

IP20

7820A/RGB | 2W/m/color | SMD 5050 | 30LEDs/m



Supplied in 5m roll.




A-A++ RGB+W

IP20

7830A/RGBW | 3W/m/color | SMD 5050 | 30LEDs/m

3M Double face adhesive.



Supplied in 5m roll.



A-A++

IP20

7820C/A | 2,16W/m | SMD 3528 | Sensor

3M Double face adhesive.




- Night time bed light.
- Set of 2x1,2m pcs.
- Switches ON when you step out of bed.

Order Code	Light Colour	CCT (K)	Watts	Input	Class		Notes
7820A/RGB	RGB	-	2W/m/color	230V / 12V DC		12	Set of LED strip + remote
7830A/RGBW	RGB + Warm white	RGB + 3000K	3W/m/color	100-240V / 12V DC		12	Set of LED strip + remote
7820C/A	Amber	1700K	2,16W/m	100-240V / 12V DC		20	Set of LED strips + sensors




The RGB & RGBW Strips 24V

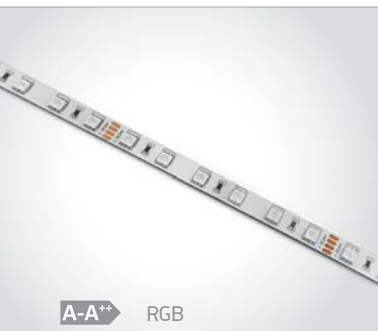

7830/RGB | 14,4W/m | SMD 5050 | 60LEDs/m

3M Double face adhesive.



Supplied in 5m roll.



Dimming remote control.
Order code 20034.



A-A++ RGB

IP20

Accessories for 7830/RGB



7834/RGB

7832/RGB




7834/RGB Power supply cable
7832/RGB Connector



7830/RGBW | 19,2W/m | SMD 5050 | 60LEDs/m

3M Double face adhesive.



Supplied in 5m roll.



Dimming remote control.
Order code 20036.



A-A++ RGB+W

IP20

Order Code	Light Colour	CCT (K)	Watts	Input	Class		Notes
7830/RGB	RGB	-	14,4W/m	24V DC		40	Requires 24V DC driver
7830/RGBW	RGB + Warm white	RGB + 3000K	RGB 14,4W/m + WW 4,8W/m	24V DC		40	Requires 24V DC driver




The Outdoor RGB Strip 24V



7830W/RGB | 14,4W/m | SMD 5050 | 60LEDs/m | Silicone

3M Double face adhesive.



Supplied in 5m roll.



Dimming remote control.
Order code 20034.



7827 | Mounting clip for 7830W



Order Code	Light Colour	CCT (K)	Watts	Input	Class	Package	Notes
7830W/RGB	RGB	-	14,4W/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight


Surface Slim Profiles



7901/AL | 2m Surface profile + PC opal diffuser | Aluminium | Suitable for 7823 & 7833 LED Strips 5mm



Complete with 2 pairs end caps & 6pcs metal fixing clips.




7836/W | 2m Square profile | Aluminium
Suitable for 7820, 7821, 7825, 7829, 7830, 7831, 7835, 7835C, 7844 & 7870 LED Strips 12mm



2m Diffuser.
Order code 7836A/P Opal.



Complete with 4 pairs end caps, 4 connectors & 6pcs fixing clips.




7836/G | 2m Square profile | Aluminium
Suitable for 7820, 7821, 7825, 7829, 7830, 7831, 7835, 7844 & 7870 LED Strips 12mm



2m Diffuser.
Order code 7836A/P Opal.




Complete with 4 pairs end caps, 4 connectors & 6pcs fixing clips.



7902/W | 2m Surface profile + PC opal diffuser | Aluminium | Suitable for 7820 & 7821 LED Strips 12mm




Complete with 2 pairs end caps & 6pcs fixing clips.



7902/B | 2m Surface profile + PC opal diffuser | Aluminium | Suitable for 7820 & 7821 LED Strips 12mm




Complete with 2 pairs end caps & 6pcs fixing clips.



7902/AL | 2m Surface profile + PC opal diffuser | Aluminium | Suitable for 7820 & 7821 LED Strips 12mm




Complete with 2 pairs end caps & 6pcs fixing clips.



Surface Profiles




7904 | 2m Surface profile + PC opal diffuser | Aluminium
 Suitable for 7820, 7821, 7825, 7829, 7830, 7831, 7835, 7844 & 7870 LED Strips 12mm



7905 | 2m Surface profile + PC opal diffuser | Aluminium
 Suitable for 7825, 7830, 7835, 7844, 7845, 7870 & 7875 LED Strips 16mm



new






Surface /Suspended Wide Profiles


External driver



7912/B | 2m Surface/Suspended profile + PC opal diffuser | Aluminium
Suitable for 7825, 7845, 7870, 7875, 7880, 7882 & 7887 LED Strips 25mm




Complete with 2 pairs end cups.



Optional Trimless kit (10pcs).
Order code 7838M.



Optional suspension wire (1pc).
Order code 7900P.



Optional 180° connector.
Order code 7900C.




Optional 90° connector.
Order code 7900R.



7912/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium
Suitable for 7825, 7845, 7870, 7875, 7880, 7882 & 7887 LED Strips 25mm




Complete with 2 pairs end cups.



Optional Trimless kit (10pcs).
Order code 7838M.



Optional suspension wire (1pc).
Order code 7900P.



Optional 180° connector.
Order code 7900C.




Optional 90° connector.
Order code 7900R.



7912A/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium | Suitable for 7880 & 7885 LED Strips 40mm



Complete with 2 pairs end cups.



Optional Trimless kit (10pcs).
Order code 7838M.




Optional suspension wire (1pc).
Order code 7900P.



Optional 180° connector.
Order code 7900C.



Optional 90° connector.
Order code 7900R.




050122/W White

050122 | Profile power supply base | With power cable | Aluminium



IP20



050122/B Black



050122/G Grey



Surface/Suspended Wide Profiles


Internal driver



7910/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium
 Suitable for 7825, 7845, 7870, 7875, 7880, 7882 & 7887 LED Strips 25mm | Use drivers on pages 635 & 636



Complete with
2 pairs end cups.



Optional Trimless kit
(10pcs).
Order code 7838M.




Optional suspension
wire (1pc).
Order code 7900P.



Optional 180°
connector.
Order code 7900C.



Optional 90°
connector.
Order code 7900R.



7910A/B | 2m Surface / Suspended profile + PC opal diffuser | Aluminium
 Suitable for 7885 LED Strips 45mm | Use drivers on pages 635 & 636



Complete with
2 pairs end cups.




Optional suspension
wire (1pc).
Order code 7900P.



Optional 180°
connector.
Order code 7900C.



Optional 90°
connector.
Order code 7900R.



7910A/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium
 Suitable for 7885 LED Strips 45mm | Use drivers on pages 635 & 636



Complete with
2 pairs end cups.




Optional suspension
wire (1pc).
Order code 7900P.



Optional 180°
connector.
Order code 7900C.



Optional 90°
connector.
Order code 7900R.



050122/W

White

IP20



050122/B

Black



050122/G

Grey







Triangular Profiles




7908A/AL | 2m Triangle profile + PC opal diffuser | Aluminium
Suitable for 7820, 7821, 7829, 7830, 7835, 7835C & 7844 LED Strips 10mm



7908/AL | 2m Triangle profile + PC opal diffuser | Aluminium | Suitable for 7820, 7821, 7825, 7829, 7830, 7831, 7835, 7835C, 7844, 7870 & 7875 LED Strips 16mm



7937T/AL | 2m Surface profile + PC semi-opal diffuser | Aluminium
Suitable for 7820, 7821, 7829, 7830, 7835, 7835C & 7844 LED Strips 12mm





7906D/AL

Side Light Surface & Suspended Profiles





7906B/AL

7906/AL | 2m Surface profile + PMMA opal square diffuser | Aluminium
Suitable for 7820, 7821, 7825, 7829, 7830, 7831, 7835 & 7844 LED Strips 15mm



Complete with 2 pairs end cups.

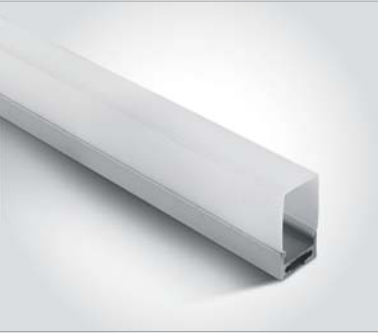

7906A/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium
Suitable for 7820, 7821, 7825, 7830, 7835, 7844, 7845, 7875, 7870 & 7887 LED Strips 16mm




Complete with 2 pairs end cups & 6pcs surface mounting clips.



Optional suspension wire (1pc).
Order code 7900P.



Optional 180° connector.
Order code 7900C.




7906B/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium
Suitable for 7845, 7882, 7875, 7880 & 7887 LED Strips 30mm



Complete with 2 pairs end cups & 6pcs surface mounting clips.



Optional suspension wire (1pc).
Order code 7900P.




7906C/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium
Suitable for 7882, 7845, 7875, 7880 & 7887 LED Strips 30mm | Use drivers on pages 635 & 636



Complete with 2 pairs end cups.



Optional suspension wire (1pc).
Order code 7900P.




7906D/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium
Suitable for 7885 & 7880 LED Strips 40mm | Use drivers on pages 635 & 636



Complete with 2 pairs end cups.



Optional suspension wire (1pc).
Order code 7900P.






Up/Down Light Wall Profile



7916/AL | 2m Wall mounted profile + PC opal diffuser | Aluminium | Suitable for 7820, 7821, 7825, 7829, 7830, 7835, 7844, 7845, 7870, 7875, 7880 & 7887 LED Strips | Use drivers on pages 635 & 636




Complete with 2 pairs end cups & 5pcs fixing clips.




Recessed Profiles




7901R/AL | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7823 & 7833 LED Strips 5mm




7902R/W | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7820 & 7821 LED Strips 12mm





7902R/B | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7820 & 7821 LED Strips 12mm




7902R/AL | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7820 & 7821 LED Strips 12mm




7904R/W | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7820, 7821, 7825, 7829 7830, 7831, 7835, 7844 & 7870 LED Strips 12mm



7904R/AL | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7820, 7821, 7825, 7829 7830, 7831, 7835, 7844 & 7870 LED Strips 12mm



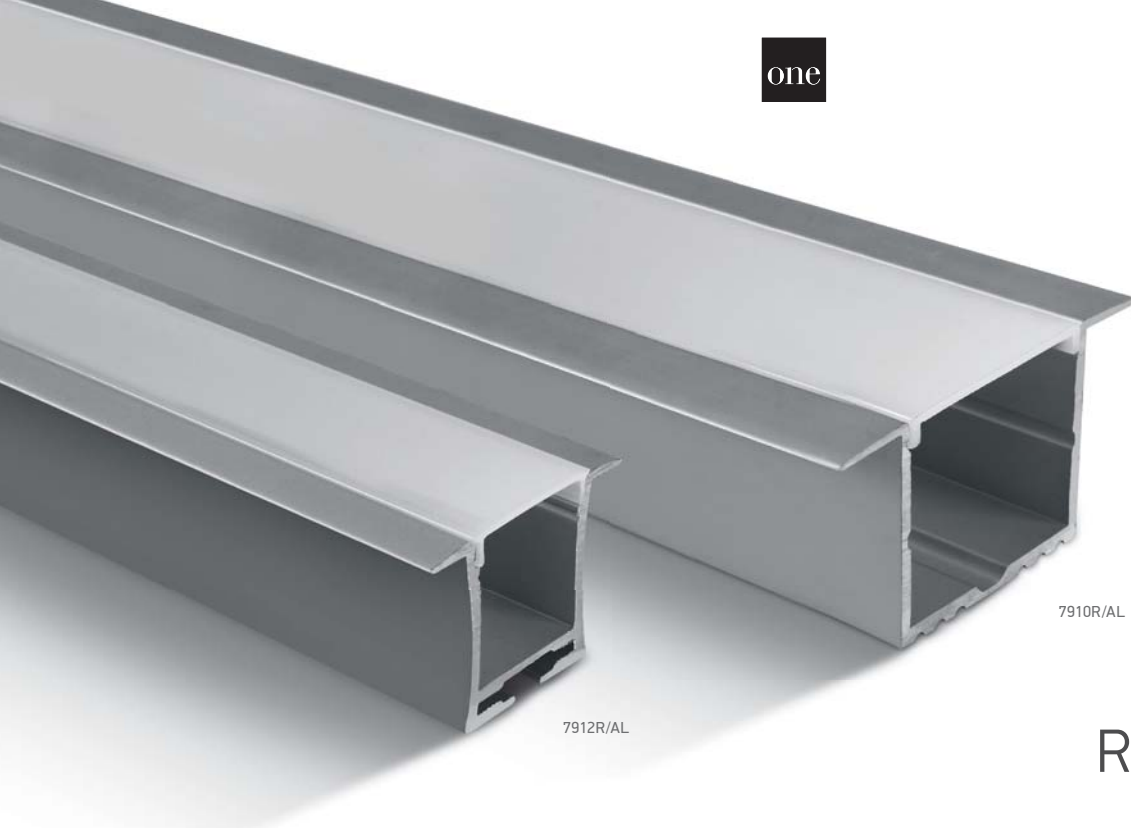

7910R/AL

7912R/AL

Recessed Profiles



7906R/W | 2m Recessed profile + PC opal diffuser | Aluminium
Suitable for 7820, 7821, 7829, 7830, 7831, 7835 & 7844 LED Strips 20mm




Complete with 2 pairs
end caps.



25x2000mm



12mm



7906R/AL | 2m Recessed profile + PC opal diffuser | Aluminium
Suitable for 7820, 7821, 7829, 7830, 7831, 7835 & 7844 LED Strips 20mm




Complete with 2 pairs
end caps.



25x2000mm



12mm



7912R/B | 2m Recessed profile + PC opal diffuser | Aluminium
Suitable for 7825, 7829, 7830, 7831, 7835, 7844, 7845, 7870, 7875, 7880 & 7887 LED Strips 20mm




Complete with 2 pairs
end caps & 6pcs
fixing clips.



25x2000mm



30mm



7912R/AL | 2m Recessed profile + PC opal diffuser | Aluminium
Suitable for 7825, 7829, 7830, 7831, 7835, 7844, 7845, 7870, 7875, 7880 & 7887 LED Strips 20mm




Complete with 2 pairs
end caps & 6pcs
fixing clips.




25x2000mm



30mm






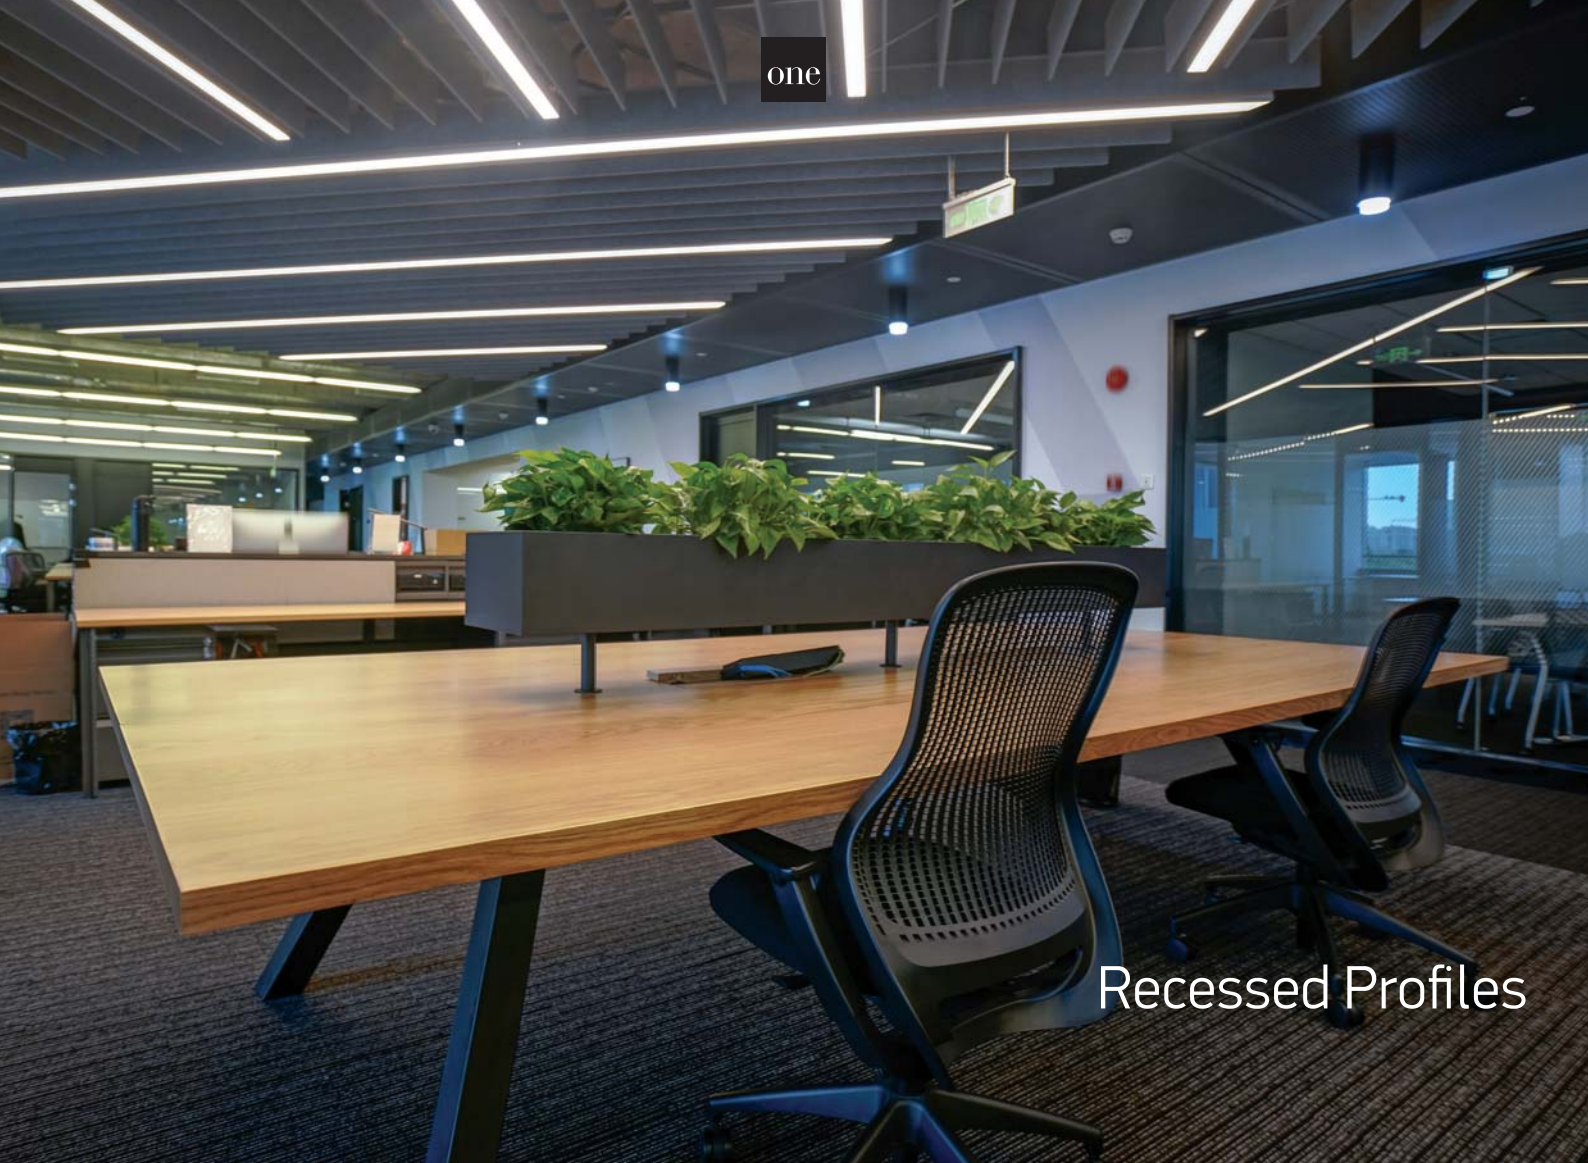


Recessed Profiles




7910R/B | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7825, 7845, 7870, 7875, 7880, 7882 & 7887 LED Strips 25mm




7910R/AL | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7825, 7845, 7870, 7875, 7880, 7882 & 7887 LED Strips 25mm



7910AR/AL | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7875, 7880 & 7885 LED Strips 40mm




Trimless Recessed Profiles

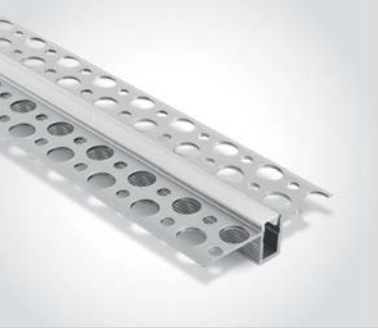


7900TR/AL | 2m Trimless profile + PC opal diffuser | Aluminium
Suitable for 7823 & 7833 LED Strips 5mm




new





7901TR/AL | 2m Trimless profile + PC opal diffuser | Aluminium
Suitable for 7820, 7821, 7823, 7829 & 7833 LED Strips 10mm





7904TR/AL | 2m Trimless profile + PC opal diffuser | Aluminium
Suitable for 7820, 7821, 7825, 7829, 7830, 7835, 7844, 7870 & 7875 LED Strips 20mm



7906TR/AL | 2m Trimless profile + PC opal diffuser | Aluminium | Suitable for 7875 & 7880 LED Strips 37mm



7904ATR/AL | 2m Trimless profile + PC opal diffuser | Aluminium | Suitable for 7820, 7821, 7825, 7829, 7830, 7835, 7844, 7845, 7870, 7875 & 7887 LED Strips 20mm





IP67 & IP68 Profiles




7918/W | 2m White profile + PMMA opal diffuser | Plastic | Suitable for 7820, 7821 & 7829 LED Strips 8mm



IP68



Complete with 2 pairs end caps & 6pcs fixing clips.




7914R/AL | 2m Inground profile + 3mm PC opal diffuser | Aluminium | Suitable for 7820, 7821 & 7829 LED Strips 8mm



IP67



Complete with 2 pairs end cups.



7915R/AL | 2m Inground profile + 3mm PC opal diffuser | Aluminium | Suitable for 7820, 7821 & 7829 LED Strips 10mm




new

IP67



Complete with 2 pairs end cups.





LED Modules



7840 | 0,72W (3LEDs x 0,24W)

Double face adhesive.

LED BUILT IN DIMMABLE

Supplied in 10pcs chain.
Total length 1,7m.



7842 | 1,44W (4LEDs x 0,36W)

Double face adhesive.

LED BUILT IN DIMMABLE

Supplied in 10pcs chain.
Total length 1,25m.


Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7840/Y	Yellow	-	0,72W	-	12V DC		100	Requires 12V DC driver
7842/D	Daylight	6000K	1,44W	64lm	12V DC		100	Requires 12V DC driver
7842/BL	Blue	-	1,44W	-	12V DC		100	Requires 12V DC driver
7842/GR	Green	-	1,44W	-	12V DC		100	Requires 12V DC driver
7842/Y	Yellow	-	1,44W	-	12V DC		100	Requires 12V DC driver

The 230V Solid LED Strip Plastic



38104B | 4W | SMD 2835 | Plastic

Connect 25 fittings maximum.




A-A++

IP20



38108B | 8W | SMD 2835 | Plastic

Connect 12 fittings maximum.




A-A++

IP20



38114B | 14W | SMD 2835 | Plastic

Connect 7 fittings maximum.



A-A++

IP20

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38104B/C	Cool white	4000K	4W	320lm	230V		30	Complete with driver
38104B/W	Warm white	3000K	4W	320lm	230V		30	Complete with driver
38108B/C	Cool white	4000K	8W	640lm	230V		30	Complete with driver
38108B/W	Warm white	3000K	8W	640lm	230V		30	Complete with driver
38114B/C	Cool white	4000K	14W	1120lm	230V		30	Complete with driver
38114B/W	Warm white	3000K	14W	1120lm	230V		30	Complete with driver




The 230V Solid LED Strip

Aluminium + PC



38104L | 4W | LED | Aluminium + PC

Connect maximum 5pcs at 110V / Connect maximum 10pcs at 230V.



A-A++



IP20

2 YEAR



38115L | 15W | LED | Aluminium + PC

Connect maximum 5pcs at 110V / Connect maximum 10pcs at 230V.

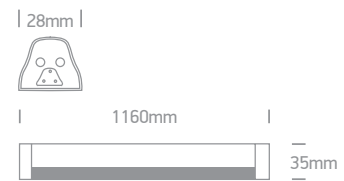

A-A++

IP20

2 YEAR

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	☐	Notes
38104L/D	Daylight	6000K	4W	305lm	100-240V	⊕	50	Includes power supply cable, corner cable, connector
38104L/W	Warm white	3000K	4W	280lm	100-240V	⊕	50	Includes power supply cable, corner cable, connector
38115L/C	Cool white	4000K	15W	1095lm	100-240V	⊕	30	Includes power supply cable, corner cable, connector


The 230V Solid Double LED Strip

Aluminium + PC




38207L | 7W | LED | Aluminium + PC

Connect maximum 5pcs at 110V / Connect maximum 10pcs at 230V.



IP20
offer

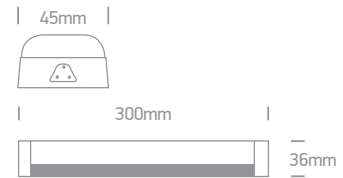


A-A++




38215L | 15W | LED | Aluminium + PC

Connect maximum 5pcs at 110V / Connect maximum 10pcs at 230V.



IP20
offer

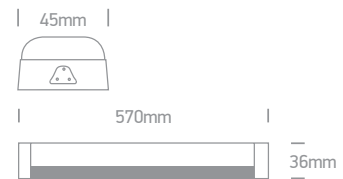


A-A++




38230L | 30W | LED | Aluminium + PC

Connect maximum 5pcs at 110V / Connect maximum 10pcs at 230V.



IP20
offer

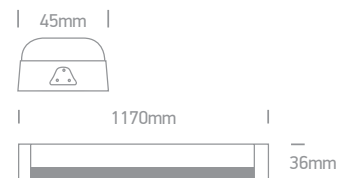

A-A++

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Box	Notes
38207L/D	Daylight	6000K	7W	530lm	100-240V	⊕	30	Includes power supply cable, corner cable, connector
38207L/C	Cool white	4000K	7W	510lm	100-240V	⊕	30	Includes power supply cable, corner cable, connector
38207L/W	Warm white	3000K	7W	490lm	100-240V	⊕	30	Includes power supply cable, corner cable, connector
38215L/D	Daylight	6000K	15W	1140lm	100-240V	⊕	25	Includes power supply cable, corner cable, connector
38215L/W	Warm white	3000K	15W	1050lm	100-240V	⊕	25	Includes power supply cable, corner cable, connector
38230L/D	Daylight	6000K	30W	2280lm	100-240V	⊕	20	Includes power supply cable, corner cable, connector
38230L/W	Warm white	3000K	30W	2100lm	100-240V	⊕	20	Includes power supply cable, corner cable, connector

The LED Shelf System


Aluminium + PC




A-A++

IP20

38103 | 3W | SMD 3014 | Aluminium + PC




2m maximum each line.

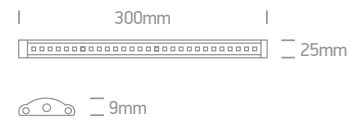


A-A++

IP20

38105 | 5W | SMD 3014 | Aluminium + PC




2m maximum each line.

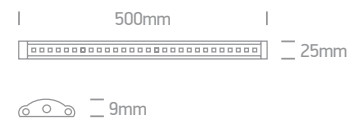


A-A++

IP20

38110 | 10W | SMD 3014 | Aluminium + PC



2m maximum each line.

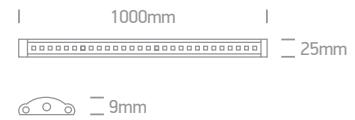


A-A++

IP20

12122 | 3W | SMD 3528 | Aluminium + PC


Can be fixed with double face adhesive or screws.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Box	Notes
38103/W	-	Warm white	3000K	3W	225lm	24V DC	III	100	Requires 24V DC driver / Includes mounting clips (2pcs), screws (2pcs)
38105/W	-	Warm white	3000K	5W	375lm	24V DC	III	50	Requires 24V DC driver / Includes mounting clips (2pcs), screws (2pcs)
38110/W	-	Warm white	3000K	10W	750lm	24V DC	III	25	Requires 24V DC driver / Includes mounting clips (3pcs), screws (3pcs)
12122/G/W	Grey	Warm white	3000K	3W	180lm	24V DC	III	100	Requires 24V DC driver

The LED Shelf System Accessories

38102A | Touch ON/OFF and dimmer | Max. 60W | 24V DC

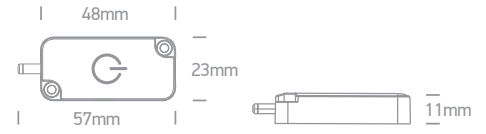


38102B | Wave hand | Door ON/OFF | Max. 60W | 24V DC

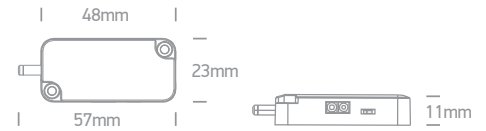

38102C | PIR Sensor | Max. 60W | 24V DC


Adjustable 1min / 5min.

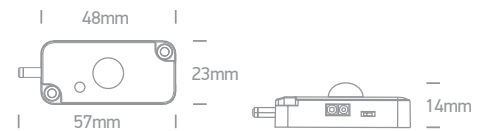


38101A | Connector for 38103, 38105 & 38110




38101B | Corner for 38103, 38105 & 38110

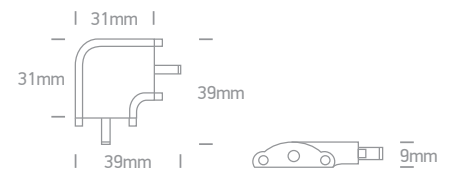

38101C | Power supply cable connector for 38103, 38105 & 38110



38101D | 8 - Way connection box | 24V DC

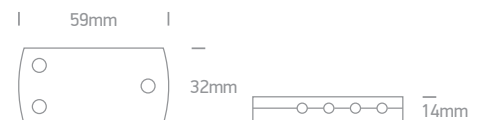




The 230V IP65 Range



7850 | 6W/m | SMD 2835 | 60LEDs/m | PVC

Cut every 1m.



Supplied in 100m roll.



A-A++

IP65



7850C Connector



7850P
230V Power supply
for 50m



7850F Fixing clip



7850L Corner




7850E End cup



7860 | 9W/m | SMD 5050 | 60LEDs/m | PVC

Cut every 1m.



Supplied in 50m roll.



A-A++

IP65



7860C Connector



7860P
230V Power supply
for 50m



7860F Fixing clip



7860L Corner



7860E End cup



7860R
Shrinking sleeve


Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7850/D	Daylight	6000K	6W/m	320lm/m	230V		100m roll	Requires 7850P power supply
7850/C	Cool white	4000K	6W/m	400lm/m	230V		100m roll	Requires 7850P power supply
7850/W	Warm white	3000K	6W/m	400lm/m	230V		100m roll	Requires 7850P power supply
7850/BL	Blue	-	6W/m	-	230V		100m roll	Requires 7850P power supply
7860/D	Daylight	6000K	9W/m	750lm/m	230V		50m roll	Requires 7860P power supply
7860/C	Cool white	4000K	9W/m	750lm/m	230V		50m roll	Requires 7860P power supply
7860/W	Warm white	3000K	9W/m	750lm/m	230V		50m roll	Requires 7860P power supply

The 230V IP65 Range



7862 | 13W/m | SMD 5630 | 120LEDs/m | PVC

Cut every 1m.



A-A++

IP65



7862C Connector



7862P
230V Power supply
for 30m



7862F Fixing clip



7862E End cup



7862L Corner connector



7862R Shrinking sleeve


Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Box	Notes
7862/C	Cool white	4000K	13W/m	1050lm/m	230V		30m roll	Requires 7862P power supply
7862/W	Warm white	3000K	13W/m	1000lm/m	230V		30m roll	Requires 7862P power supply

24V Linkable Modules


Aluminium




38001A | 1W | LED | Aluminium

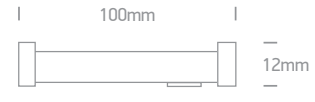

38002A | 3W | LED | Aluminium



38005A | 6W | LED | Aluminium



38006 & 38007 | Power supply cable and corner cable for 38001A, 38002A & 38005A


Power supply cable
 38006A For DL and WW
 38006B For BL
 38006C For RGB

Corner cable
 38007A For DL and WW
 38007B For BL
 38007C For RGB




Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38001A/D	Daylight	6000K	1W	64lm	24V DC		100	Requires 24V DC driver
38001A/W	Warm white	3000K	1W	60lm	24V DC		100	Requires 24V DC driver
38001A/BL	Blue	-	1W	-	24V DC		100	Requires 24V DC driver
38001A/RGB	RGB	-	1W	-	24V DC		100	Requires 24V DC driver
38002A/D	Daylight	6000K	3W	144lm	24V DC		100	Requires 24V DC driver
38002A/W	Warm white	3000K	3W	135lm	24V DC		100	Requires 24V DC driver
38002A/BL	Blue	-	3W	-	24V DC		100	Requires 24V DC driver
38002A/RGB	RGB	-	3W	-	24V DC		100	Requires 24V DC driver
38005A/D	Daylight	6000K	6W	384lm	24V DC		100	Requires 24V DC driver
38005A/W	Warm white	3000K	6W	360lm	24V DC		100	Requires 24V DC driver
38005A/BL	Blue	-	6W	-	24V DC		100	Requires 24V DC driver

IP67 Flex Lightline

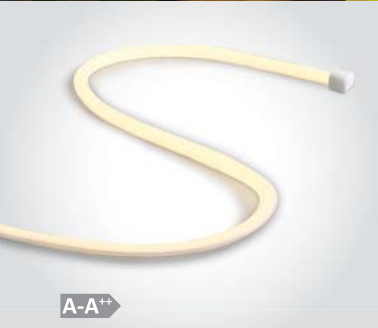

A-A+

7811 | 10W/m | SMD 2216 | 192 LEDs | Silicone



IP67



Supplied in 5m roll.



Accessories for 7811



- 7811F Fixing clip
- 7811E End cup




Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7811/C	Cool white	4000K	10W/m	550lm/m	24V DC		40	Requires 24V DC driver
7811/W	Warm white	3000K	10W/m	550lm/m	24V DC		40	Requires 24V DC driver



7810/D

Flex Lightline

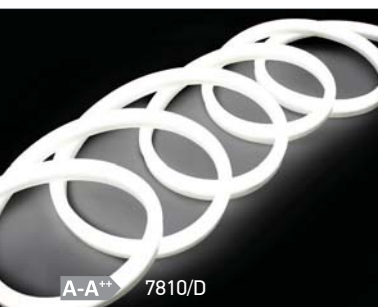

A-A++ 7810/D

7810 | 4,8W/m | LED | Silicone




IP54



Supplied in 50m roll.

27mm

Cut every 100cm

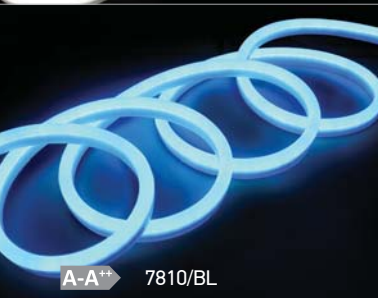

A-A++ 7810/BL

7810 | 4,8W/m | LED | Silicone




IP54



Supplied in 50m roll.

27mm

Cut every 100cm

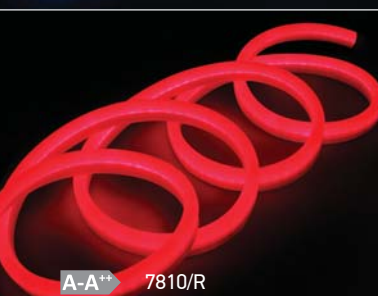

A-A++ 7810/R

7810 | 4,8W/m | LED | Silicone




IP54



Supplied in 50m roll.

27mm

Cut every 100cm

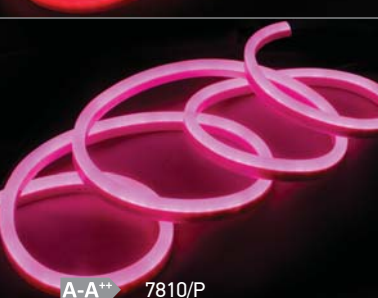


A-A++ 7810/P

7810 | 4,8W/m | LED | Silicone




IP54



Supplied in 50m roll.

27mm

Cut every 100cm

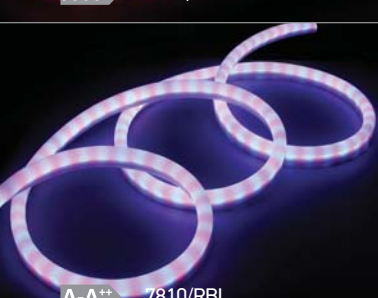

A-A++ 7810/RBL

7810 | 4,8W/m | LED | Silicone



IP54

offer



Supplied in 50m roll.

27mm

Cut every 100cm



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Box	Notes
7810/D	Daylight	6000K	4,8W/m	180lm/m	230V	□	50m roll	Requires 7814 power supply
7810/BL	Blue	-	4,8W/m	-	230V	□	50m roll	Requires 7814 power supply
7810/R	Red	-	4,8W/m	-	230V	□	50m roll	Requires 7814 power supply
7810/P	Pink	-	4,8W/m	-	230V	□	50m roll	Requires 7814 power supply
7810/RBL	Red + Blue	-	4,8W/m	-	230V	□	50m roll	Requires 7818 controller RBL

Flex Lightline Accessories



7814 | Power supply for 7810

Connect maximum 50m.



7818 | RBL Controller for 7810/RBL

Connect maximum 30m.



offer



Accessories for 7810



400
25

- 7812 Connector
- 7817 End cup




7815 | 2m Profile for 7810 | Aluminium



10

- 7815/W White
- 7815/G Grey

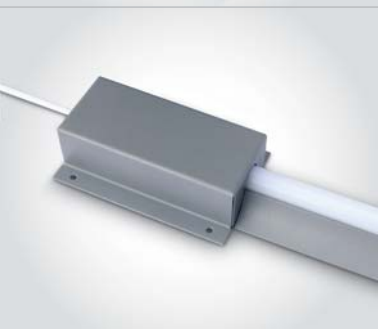


7815B | Housing box for 7814, 7818 & 7819



8

- 7815B/W White
- 7815B/G Grey



Order Code	Colour	Input	Class			Notes
7814	White	230V		150cm	100	-
7818	White	230V		80cm	48	-